



# ELITE SERIES REFRIGERATION

SERVING THE FOOD INDUSTRY SINCE 1951

## 5 CU. FT. SWING DOOR REFRIGERATION

Model: VR06 Item 41214

Medium countertop, ideal for promotions or impulse new products.



### KEY FEATURES

- **BMAD refrigeration system,** allow to cool down the interior and maintain the temperature range with a minimum energy consumption.
- **30 gauge exterior pre-painted steel,** brings years of duration.
- **Electronic temperature controller,** assures an optimal performance of the cooler, making the product temperature ideal for its consumption.
- **High efficiency glass door,** with a double panel and a low-e film reduces the condensation. Self closing system allow the door to get back to its original position, taking care not to damage it.
- **LED lighting system,** uses a portion of the energy of regular fluorescent lights, and need no replacement for seven years.
- **CFC and HFC free Cyclopentane foam,** is eco-friendly and a high efficiency insulator.
- **Electronic fan motors,** allow a better performance, using only a portion of the energy required by a shaded pole motor.
- **Low maintenance condenser,** prevents dust from blocking air flow and thus saving energy and increasing compressor's life.



Establishing a NEW STANDARD in the commercial refrigeration industry.



COMMERCIAL REFRIGERATOR  
AND/OR FREEZER  
9242



NSF/ANSI 7 COMMERCIAL REFRIGERATOR  
AND/OR FREEZER  
20YY




Authorized Dealer

# ELITE SERIES REFRIGERATION


5 CU. FT. SWING DOOR REFRIGERATION




## PRODUCT DIMENSION

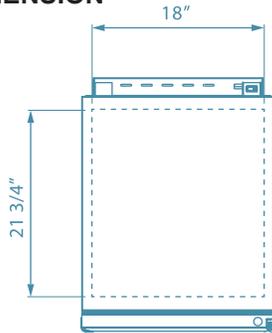

TOP VIEW

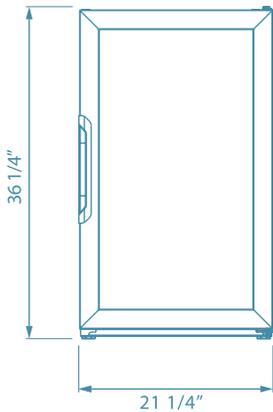

FRONT VIEW

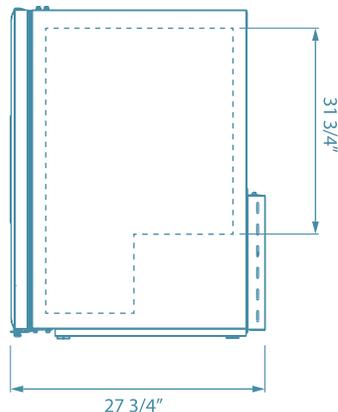


SIDE VIEW

## TECHNICAL SPECIFICATIONS

ITEM NUMBER	41214
MODEL	VR06
DESCRIPTION	5 cu.ft. Swing Door Refrigeration
VOLUME	5.1 ft <sup>3</sup> / 144.4 liters
DOORS	1
SHELVES	3
SHELF SIZE	Small - 17 3/4" x 6 1/8" / 450mm x 157mm Regular - 17 1/8" x 17 3/8" / 435mm x 440mm
CAPACITY	20 oz. - Flat: 84 12 oz. - Flat: 132
TEMPERATURE RANGE	0°C - 7°C / 32°F - 44.6°F
ENERGY CONSUMPTION	1.740 kWh/day*
ELECTRICAL	115 V / 60 Hz / 1 Ph
CORD LENGTH	118" / 3000 mm
HORSEPOWER	1/8
AMPS	2.5
WEIGHT	Gross: 126.8 lbs. / 57.5 kg. Crated: 136.9 lbs. 62.1 kg.
INTERNAL DIMENSIONS (WDH)	18" x 21.75" x 31.75" / 456 x 554 x 807mm
DIMENSIONS (WDH)	21.25" x 27.75" x 36.25" / 540 x 704 x 921mm

\* Energy consumption based on ANSI/ASHRAE Standard 72-2005.

5'9" / 1790mm

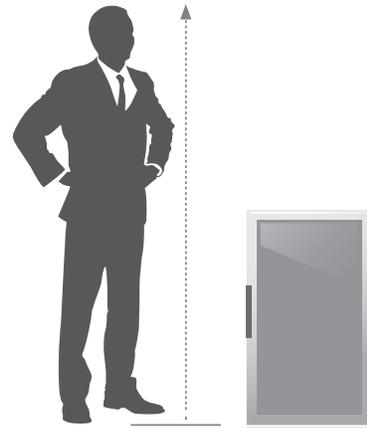


VR 06



COMMERCIAL REFRIGERATOR  
AND/OR FREEZER  
9242



NSF/ANSI 7 COMMERCIAL REFRIGERATOR  
AND/OR FREEZER  
20YY



BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.

## OMCAN INC.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com



Follow us to keep up to date with the latest news and offers



2015.E.O.E