



# DISHWASHER

SERVING THE FOOD INDUSTRY SINCE 1951

## 26-INCH HEAVY-DUTY DISHWASHER WITH 7.5 kW POWER

Item: 46488 Model: CD-KR-SR04T



*Product might not be exactly as shown.*

### HIGH PERFORMANCE AND QUALITY HEAVY-DUTY DISHWASHER

#### FEATURES

- Maximum rack capacity of 55 racks per hour at 140°F incoming water
- Maximum rack capacity of 40 racks per hour at 59°F incoming water
- Stainless steel non-clogging wash and rinse impeller
- Automatic water fill; automatic start / stop
- Easy change hanging remote control panel
- 304L stainless steel for corrosion resistance
- Easily removable (large capacity) one-piece strainer



### WARRANTY

PARTS AND LABOR



Authorized Dealer

# DISHWASHER

26-INCH HEAVY-DUTY DISHWASHER WITH 7.5 KW POWER



## FEATURES OF PROGRAMMABLE CONTROLLER

- Maximizes washing efficiency and provides a clean environment
- Minimum required wash and rinse temperatures
- Built-in electric heater (pre-heating 50 minutes) with 2 powerful rinse pumps
- Constant pressure and temperature
- Pumped liquid detergent and rinse agent
- Automatic pumped drain

## STANDARD FEATURES

- Raises incoming water 59°F (15°C) → 180°F (82°C) hot water sanitizing
- Variable time cycles: 30 - 210 seconds
- Maximum rack capacity of 55 racks per hour at 140°F (60°C) incoming water
- Maximum rack capacity of 40 racks per hour at 59°F (15°C) incoming water
- Automatic water fill; automatic start / stop
- 3 factory preset options (40/36/30 racks per hour; 90/100/120 seconds per cycle): 70 seconds powerful wash | 10 seconds dwell time | 10 seconds hot water rinse
- Stainless steel non-clogging wash and rinse impeller
- Easy change hanging remote control panel
- 304L stainless steel for corrosion resistance
- Either straight-through or corner applications
- Easily removable, large capacity, one-piece strainer
- Solid state, integrated LED display controls with status indicators
- Low-noise and large output 1 HP washing pump
- Door coupled by stainless steel, spring counterbalanced handle
- Stainless steel bearing guide for ease of operation and long life
- Rotating/pressing rinse impellers - both upper and lower; different feature rinse nozzles are easily removable and interchangeable for cleaning and inspection
- Door actuated start
- Service diagnostics
- Listed on US patent

## PRODUCT SPECIFICATIONS

<b>ITEM</b>	<b>46488</b>	<b>VARIABLE TIME CYCLE</b>	<b>30 - 210 seconds</b>
<b>MODEL</b>	<b>CD-KR-SR04T</b>	<b>CYCLE (SEC)</b>	<b>90 seconds</b>
<b>POWER</b>	<b>7.5 kW</b>	<b>1 CYCLE WATER CONSUMPTION</b>	<b>0.71 gal. / 2.7L</b>
<b>AMPS</b>	<b>20 Amps</b>	<b>HOT WATER TEMPERATURE</b>	<b>59°F (15°C) → 180°F (82°C)</b>
<b>WASH PUMP POWER</b>	<b>1 HP</b>	<b>ELECTRICAL</b>	<b>220V / 60Hz / 3Ph</b>
<b>MAXIMUM RACK CAPACITY</b>	<b>55 Racks / hr. at 140°F incoming water 40 Racks / hr. at 59°F incoming water</b>	<b>DIMENSIONS (DWH)</b>	<b>31.4" x 26.1" x 70" (96.7" (H) when open)</b>
		<b>WEIGHT</b>	<b>227 lbs. / 103 kg.</b>

## OMCAN INC.

Telephone: 1-800-465-0234  
Fax: (905) 607-0234  
E-mail: sales@omcan.com  
Website: www.omcan.com



Follow us to keep up to date with the latest news and offers



2020.E.O.E

# DISHWASHER

TECHNICAL DRAWINGS WITH DETAILED DIMENSIONS



## LEGENDS

HEIGHT	Door Open	96.7"
	Door Close	70"
ELECTRIC	A	23.7"
	a	3.5"
WATER	B	26.9"
	b	4.4"
DRAIN	C	3.2"
	c	4.7"

### Ø = Electrical Supply Connection

220V/60/3 / 19.7Amp

Comes with 6 ft. (1.8 m) cord for direct connection

### W = Hot Water Connection


10 PSI - 40 PSI (0.7 kg / cm<sup>2</sup> - 2.8 kg / cm<sup>2</sup>)

Optimum water pressure - 15 PSI (1.0 kg / cm<sup>2</sup>)

Spry water hardness: 5 grains

### D = Drain Hose Connection

Max. Height: 18" (457 mm)

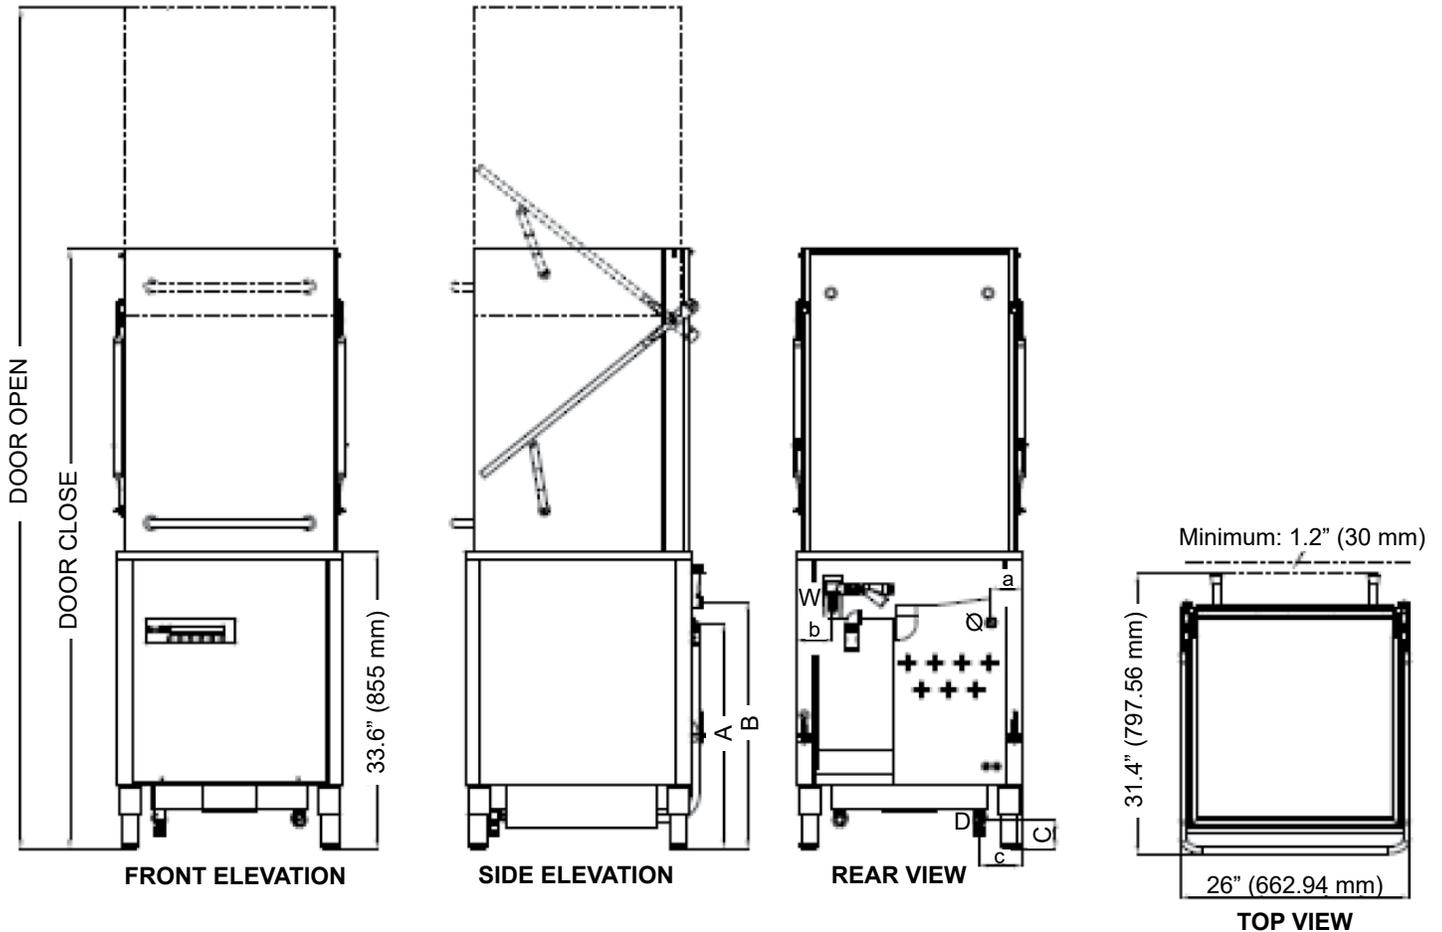

## OMCAN INC.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

E-mail: sales@omcan.com

Website: www.omcan.com



Follow us to keep up to date with the latest news and offers



2020.E.O.E