



DISHWASHER

CENTER OF ALL YOUR FOOD SERVICE NEEDS

UPRIGHT HIGH TEMPERATURE DISHWASHER WITH DIGITAL CONTROL

Item: 46797

Model: CD-GR-1500



*High Performance and Quality
Upright Dishwasher*

Features:

- Automatic Fill
- Double skin door
- Automatic drain pump
- Self-cleaning mode
- Built in booster heater
- Built in chemical pumps
- IP 44 washing pump
- Guarantee rinse temperature
- Self-diagnostic mode
- 3 washing programs available
- Easy access for maintenance
- Durable inox construction
- Standard pressure reducer valve (PRV)
- Standard back cover

Product might not be exactly as shown



Authorized Dealer



WARRANTY
PARTS AND LABOR



DISHWASHER

UPRIGHT DISHWASHER



NOTE:
Normal operation generates steam that may escape from the door. Materials like wood, laminate etc. are unsuitable for areas exposed to dishwasher steam and only stainless steel surfaces is recommended.

Parts:

1. NSF certified indicators for wash temperature, rinse temperature and rinse pressure
2. 304 stainless steel body and handle, heavy duty & corrosion resistant
3. Upper and lower wash/rinse arms with high temperature cycles
4. 1 peg rack, 1 flat rack & 1 cutlery tray included

Commercial dish washer model: CD-GR-1500

- Rinse with fresh water
- Guarantee rinse temperature
- Connection to minimum 55°C water supply
- Minimum - Maximum set point Temp adjustment: 30°C - 90°C

PRODUCT SPECIFICATIONS

ITEM	46797
MODEL	CD-GR-1500
BASKET SIZE	20" x 20" / 500 x 500 mm
POWER SUPPLY	208-240V / 60Hz / 1 Ph
POWER	10.5 kW
AMP	44 A
WASH PUMP MOTOR	1.5 HP

Plug and Wire (not included): Requires a certified electrician to install unit.

WATER CONNECTION

FLOW PRESSURE	20 psi ± 5
WATER CONSUMPTION / RACK	0.7 gal (2nd program)
WATER CONSUMPTION / HOUR	13.2 gph
WATER INLET CONNECTION	3/4"
DRAINING CONNECTION	1.2"

CAPACITY

CAPACITY	Booster tank: 7.4L, Wash tank: 68L
HEATING ELEMENT	Booster tank: 7.5 kW, Wash tank: 6 kW
RACK / HOUR (1ST PROGRAM)	28
RACK / HOUR (2ND PROGRAM)	19
RACK / HOUR (3RD PROGRAM)	14
WASH CYCLE 1	103 SEC
WASH CYCLE 2	163 SEC
WASH CYCLE 3	223 SEC
RINSE CYCLE	16 SEC

WORKING TEMPERATURE


WASHING	72 °C / 161 °F
RINSING	72 °C / 161 °F
MIN-MAX SET POINT TEMPERATURE	30°C - 90°C

DIMENSIONS

DOOR CLEARANCE	16" / 400 mm
USEFUL DOOR OPENING	15.5" / 395 mm
NET DIMENSIONS (WDH)	30" x 36" x 57" / 751 x 920 x 1449 mm (74" / 1882 mm open)

GROSS DIMENSIONS

GROSS DIMENSIONS	30" x 35" x 57" / 760 x 880 x 1440 mm
GROSS WEIGHT	284 lbs/ 129 kg

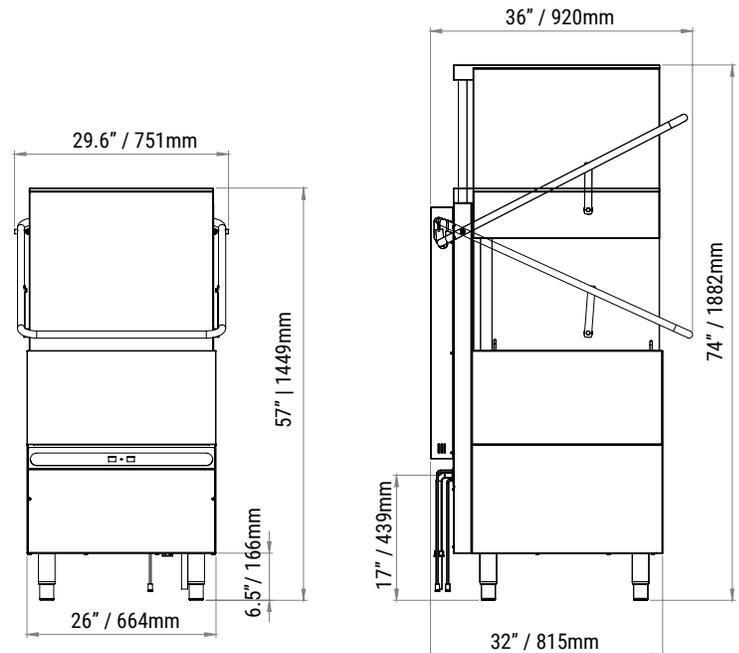

OMCAN INC.

Telephone: 1-800-465-0234
 Fax: (905) 607-0234
 E-mail: sales@omcan.com
 Website: www.omcan.com



Follow us to keep up to date with the latest news and offers

