

Kromo Aqua Undercounter Dishwasher

ITEM: 49125
MODEL: CD-IT-50-1-AQUA



Simple, yet effective

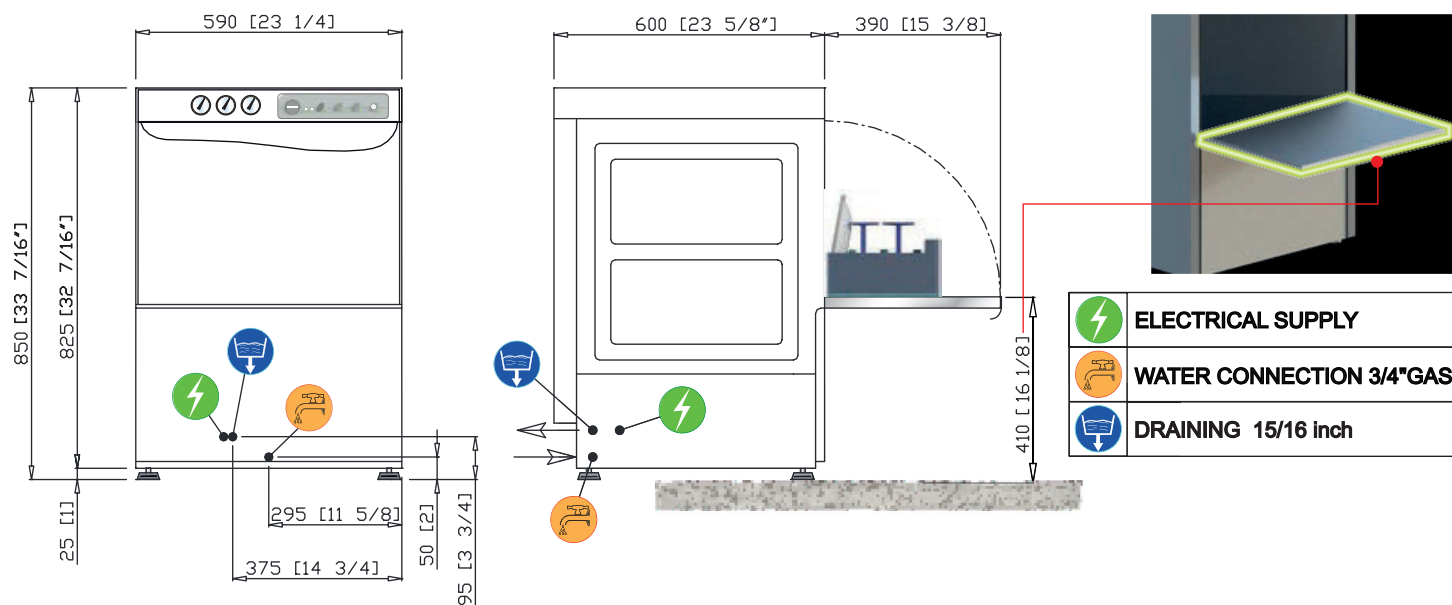
This dishwasher is ideal for bars, pubs, restaurants, and hotels. These undercounter machines, with a redesigned control panel, features a wide loading capacity granting the highest performance at a reasonable price.

FEATURES:

- Double skin door
- 1 wash cycle
- Overflow and drain pipes integrated system, for a triple protection of the wash pump
- Anti-drop roof panel
- Door security microswitch
- Split wash and rinse arms
- Built-in rinse-aid dispenser
- Fully automatic process
- Standard drain pump
- Detergent dispenser

OPTIONS:

- Cold rinse
- S/S surface filters

Technical Drawing

Technical Specification

Item	49125	
Model	CD-IT-50-1-AQUA	
Water Hardness	2 - 8 °F	
Rinsing Temperature (Set)	185 °F (85 °C)	
Tank Capacity	30.64 Qt. (29 L)	
Tank Heating Element	2940 W	
Tank Temperature (Set)	160 °F (71 °C)	
Booster Capacity	6.04 Qt. (5.71 L)	
Booster Heating Element	6530 W	
Inlet Water Pressure	25 - 95 PSI	
Power	7090 W	
Electrical	220-240V / 60 Hz / 1 Ph	
Water Consumption / Cycle (rinse pressure 15 PSI)	2.96 Qt. (2.8 L)	
Washing Cycles (sec)	1 (120)	2 (180)

Water Supply 131 °F Racks /H (*) (¹)	30	20
Water Supply 50 °F Racks /H (*) (¹)	21	20
Pump Power	560 W (359 Qt./339 L per minute***)	
Drain Pump	43 W hMAX 31.5" (800 mm) (43.12 Qt. / 40.8 L***)	
Noise	63 dB(A)	
Rack Equipment	(1) Plastic Plates Basket (1) Large Mesh Glass Basket (1) Cutlery Basket	
Rack Dimensions	20" x 20" (508 x 508 mm)	
Crockery Dimensions	Plates: 13.62" (346 mm) dia. Dishes Max Height: 12.62" (320 mm)	
Net Weight	125 lb. (56.5 kg.)	
Net Dimensions (WDH)	23.25" x 23.62" x 33.43" (591 x 600 x 850 mm)	
Gross Weight	143 lb. (65 kg.)	
Gross Dimensions (WDH)	26" x 26" x 40" (660 x 660 x 1010 mm)	

(*) Standard Thermostop

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

(***) Maximum Flow Rate