

Reach In Refrigerator 1 Glass Swing Door 30" 115V/60Hz/1Ph cETLus ETL Sanitation

ITEM: 50123
MODEL: RE-CN-29R-HC



Perfect refrigerator for storage and front of house usage.

Spacious stainless steel refrigerator crafted with enduring quality. Sleek design featuring a self closing glass door, high-efficiency components, and a wide handle. Ideal for front of house operations such as customer convenience.

FEATURES:

• 4 Shelves

4 plastic coated shelves with 88lb loading capacity

• Self Closing Glass Door


Equipped with a self closing door to prevent loss of efficiency from the door being left open accidentally

• Automatic Defrost System


The appliance automatically defrosts to avoid ice build-up and lengthens lifespan

• LED Lighting System

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.



TECHNICAL DRAWING

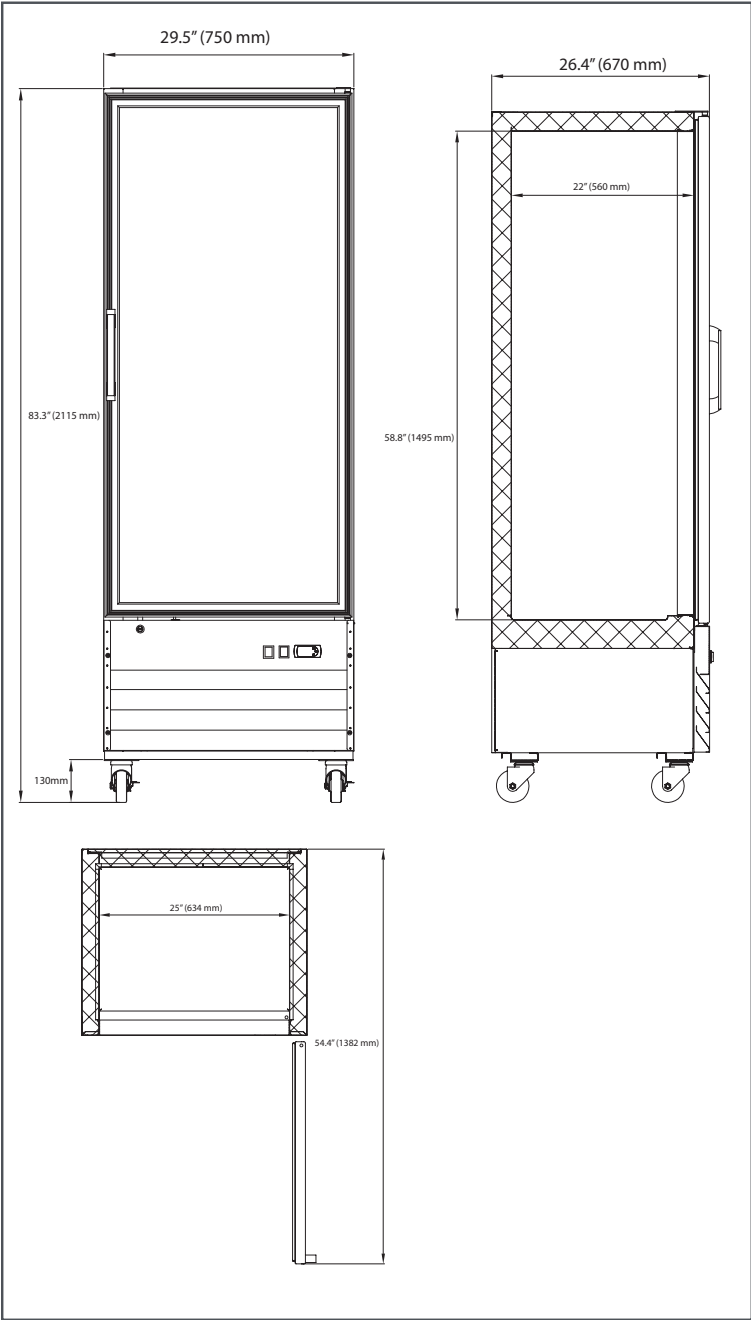

TECHNICAL SPECIFICATION

Item	50123
Model	RE-CN-29R-HC
Capacity	16.3 cu. ft. (461 L)
Maximum Load	88lbs (40kg)
Number of Doors	1 Swing Door
Number of Shelves	4
Shelf Capacity	88lbs (40kg)
Shelf Size	24" x 18" (600 x 460 mm)
Shelf Material	Plastic Coated
Exterior Material	Stainless Steel
Number of Casters	4
Power	335 W
Amps	3.4 A
Electrical	115V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	0.5 to 4.4°C (33 to 40°F)
Refrigerant	R290
Max Ambient Temp	32.2 °C (90 °F)
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Interior Dimensions (WDH)	25" x 22" x 58.8" (634 x 560 x 1495 mm)
Net Dimensions (WDH)	30" x 26.3" x 82.2" (750 x 670 x 2088 mm)
Gross Dimensions (WDH)	32.3" x 30.1" x 84.6" (820 x 765 x 2150 mm)
Net Weight	242 lb. (109.7 kg.)
Gross Weight	268.4 lb. (121.5 kg.)

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.