



REFRIGERATION

SERVING THE FOOD INDUSTRY SINCE 1951


Reach In Refrigerator 3 Glass Swing Doors 79" 115V/60Hz/1Ph cETLus ETL Sanitation

ITEM:

50125

MODEL:

RE-CN-79R-HC

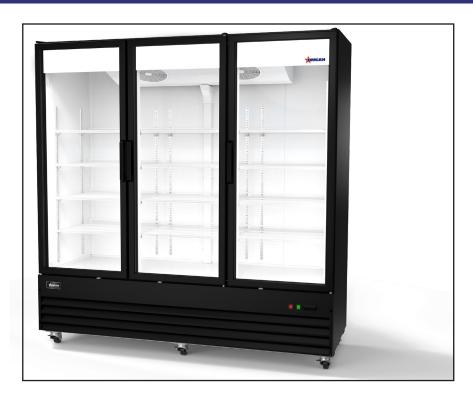

FEATURES:

• 12 Shelves

12 plastic coated shelves with 88lb loading capacity

· Self Closing Glass Doors

Equipped with a self closing door to prevent loss of efficiency from the door being left open accidentally

Automatic Defrost System

The appliance automatically defrosts to avoid ice build-up and lengthens lifespan

LED Lighting System

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

Perfect refrigerator for storage and front of house usage.

Spacious stainless steel refrigerator crafted with enduring quality. Sleek design featuring a self closing glass door, high-efficiency components, and a wide handle. Ideal for front of house operations such as customer convenience.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

Email: sales@omcan.com

Website: www.omcan.com


















REFRIGERATION



TECHNICAL DRAWING 78.7" (2000 mm) 83.3"(2115 mm 30.7" (780 mm) 26.4" (670 mm)

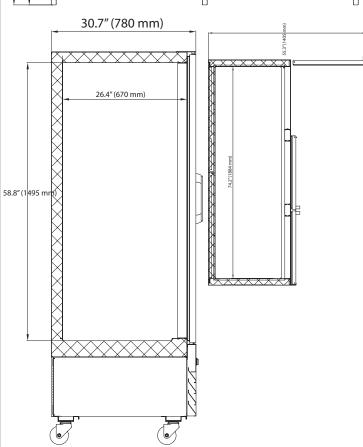

TECHNICAL SPECIFICATION	
Item	50125
Model	RE-CN-79R-HC
Capacity	59.5 cu. ft. (1985 L)
Maximum Load	88lbs (40kg)
Number of Doors	3 Swing Doors
Number of Shelves	12
Shelf Capacity	88lbs (40kg)
Shelf Size	25" x 22" (634 x 560 mm)
Shelf Material	Plastic Coated
Exterior Material	Stainless Steel
Number of Casters	6
Power	625 W
Amps	6.9 A
Electrical	115V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	0.5 to 4.4°C (33 to 40°F)
Refrigerant	R290
Max Ambient Temp	26.6 °C (80 °F)
Insulation Material	Cyclopentane
Defrosting	Automatic
Cooling System	Forced Air
Interior Dimensions (WDH)	74.1" x 26.4" x 58.8" (1884 x 670 x 1495 mm)
Net Dimensions (WDH)	78.7" x 30.7" x 82.2" (2000 x 780 x 2088 mm)
Gross Dimensions (WDH)	81.5" x 34.4" x 84.6" (2070 x 875 x 2150 mm)
Net Weight	550 lb. (250 kg.)
Gross Weight	609.4 lb. (276.4 kg.)

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.