



DISHWASHER

SERVING THE FOOD INDUSTRY SINCE 1951

26-INCH HEAVY-DUTY DISHWASHER WITH 7.5 kW POWER

Item: 46487 Model: CD-KR-SR04



**HIGH PERFORMANCE AND QUALITY
HEAVY-DUTY DISHWASHER**

FEATURES

- Maximum rack capacity of 40 racks per hour
- Stainless steel non-clogging wash and rinse impeller
- Automatic water fill; automatic start / stop
- Easy change hanging remote control panel
- 304L stainless steel for corrosion resistance
- Easily removable (large capacity) one-piece strainer

Product might not be exactly as shown.



WARRANTY

PARTS AND LABOR



Authorized Dealer

DISHWASHER

26-INCH HEAVY-DUTY DISHWASHER WITH 7.5 KW POWER



FEATURES OF PROGRAMMABLE CONTROLLER

- Maximizes washing efficiency and provides a clean environment
- Minimum required wash and rinse temperatures
- Built-in electric heater (pre-heating 50 minutes) with powerful rinse pumps
- Constant pressure and temperature
- Pumped liquid detergent and rinse agent
- Automatic pumped drain

STANDARD FEATURES

- Raises incoming water 59°F (15°C) → 180°F (82°C) hot water sanitizing
- Variable time cycles: 30 - 210 seconds
- Maximum rack capacity of 40 racks per hour
- Automatic water fill; automatic start / stop
- 3 factory preset options (40/36/30 racks per hour; 90/100/120 seconds per cycle): 45 seconds powerful wash | 10 seconds dwell time | 10 seconds hot water rinse | 30 seconds steam evaporation
- Stainless steel non-clogging wash and rinse impeller
- Easy change hanging remote control panel
- 304L stainless steel for corrosion resistance
- Either straight-through or corner applications
- Easily removable, large capacity, one-piece strainer
- Solid state, integrated LCD display controls with status indicators
- Low-noise and large output 1 HP washing pump
- Door coupled by stainless steel, spring counterbalanced handle
- Stainless steel bearing guide for ease of operation and long life
- Rotating/pressing rinse impellers - both upper and lower; different feature rinse nozzles are easily removable and interchangeable for cleaning and inspection
- Door actuated start
- Service diagnostics
- Listed on US patent

PRODUCT SPECIFICATIONS

ITEM	46487	CYCLE (SEC)	90 seconds
MODEL	CD-KR-SR04	1 CYCLE WATER CONSUMPTION	0.71 gal. / 2.7L
POWER	7.5 kW	HOT WATER TEMPERATURE	59°F (15°C) → 180°F (82°C)
AMPS	34.4 Amps	ELECTRICAL	220V / 60Hz / 1Ph
WASH PUMP POWER	1 HP	DIMENSIONS (DWH)	35" x 26.1" x 66.2" (85.8" (H) when open)
MAXIMUM RACK CAPACITY	40 Racks / hr.	WEIGHT	308 lbs. / 140 kg.
VARIABLE TIME CYCLE	30 - 210 seconds		

OMCAN INC.

Telephone: 1-800-465-0234
Fax: (905) 607-0234
E-mail: sales@omcan.com
Website: www.omcan.com



Follow us to keep up to date with the latest news and offers



2020.E.O.E

DISHWASHER

TECHNICAL DRAWINGS WITH DETAILED DIMENSIONS



LEGENDS

HEIGHT	Door Open	85.8"
	Door Close	66.2"
ELECTRIC	A	22.7"
	a	3.5"
WATER	B	27.1"
	b	4"
DRAIN	C	19.8"
	c	4.6"

Ø = Electrical Supply Connection

220V/60/1 / 34.4Amp

Comes with 6 ft. (1.8 m) cord for direct connection

W = Hot Water Connection


10 PSI - 40 PSI (0.7 kg / cm² - 2.8 kg / cm²)

Optimum water pressure - 15 PSI (1.0 kg / cm²)

Spry water hardness: 5 grains

D = Drain Hose Connection

Max. Height: 18" (457 mm)

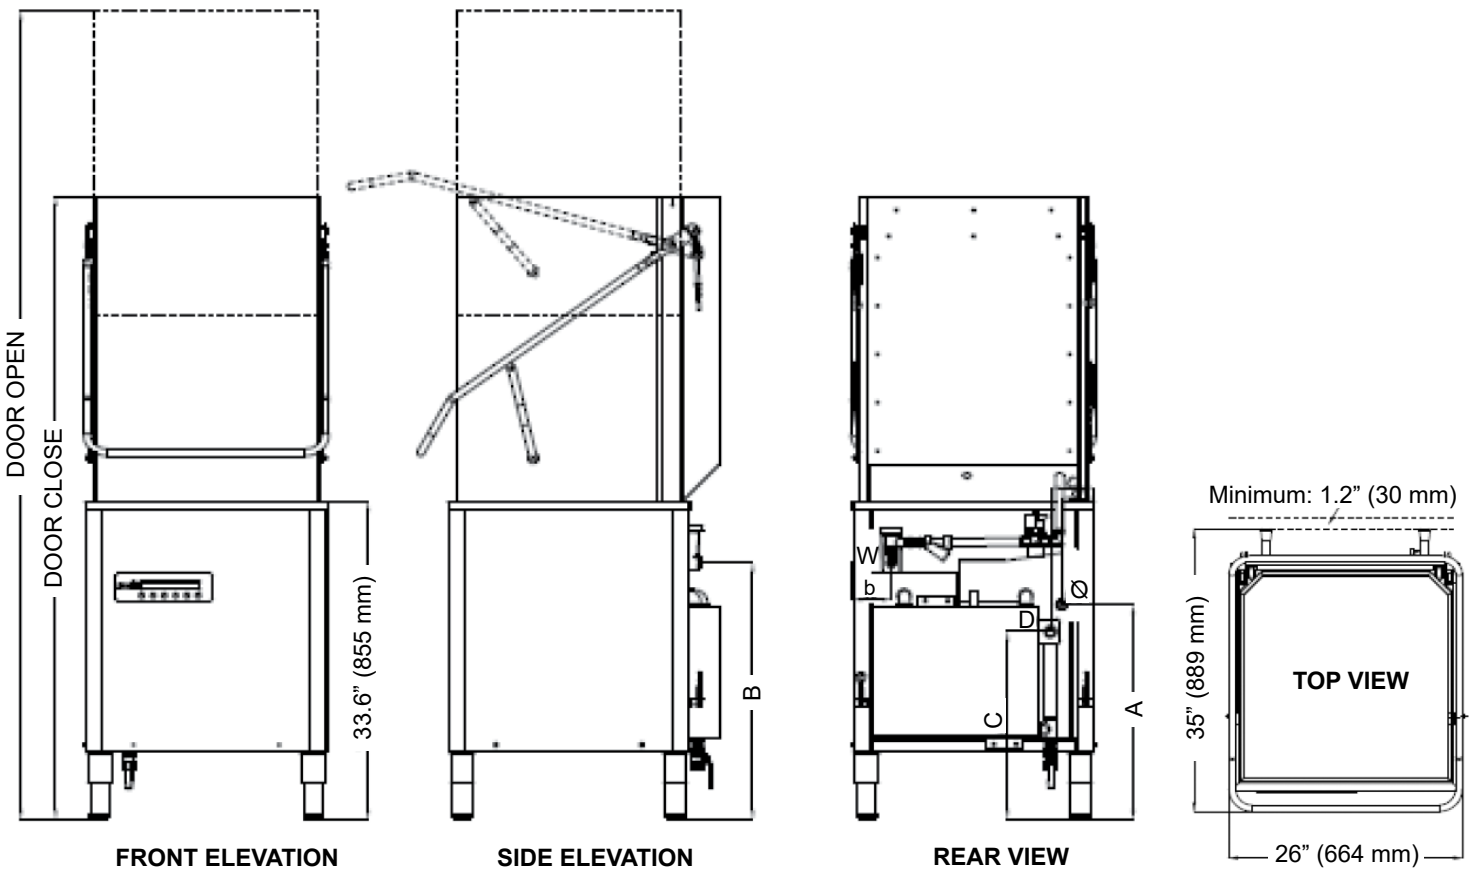

OMCAN INC.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

E-mail: sales@omcan.com

Website: www.omcan.com



Follow us to keep up to date with the latest news and offers



2020.E.O.E