



DISHWASHER

SERVING THE FOOD INDUSTRY SINCE 1951

24-INCH UNDERCOUNTER HEAVY-DUTY DISHWASHER WITH 3.8 kW POWER

Item: 46562 Model: CD-KR-SU01

**HIGH PERFORMANCE,
HIGH-QUALITY UNDERCOUNTER
HEAVY-DUTY DISHWASHER**

FEATURES

- Maximum rack capacity of 40 racks per hour
- Stainless steel non-clogging wash and rinse impeller
- Automatic water fill; automatic start / stop
- 304L stainless steel for corrosion resistance
- Easily removable large capacity strainer



Product might not be exactly as shown.



WARRANTY

PARTS AND LABOR



Authorized Dealer

DISHWASHER

24-INCH HEAVY-DUTY DISHWASHER WITH 3.8 KW POWER



FEATURES OF PROGRAMMABLE CONTROLLER

- Maximizes washing efficiency and provides a clean environment
- Minimum required wash and rinse temperatures
- Built-in electric heater with powerful rinse pump
- Constant pressure and temperature
- Pumped liquid detergent and rinse agent
- Automatic pumped drain

STANDARD FEATURES

- Raises incoming water 140°F (60°C) → 180°F (82°C) hot water sanitizing
- Variable time cycles (30~210 seconds)
- Maximum rack capacity of 40 racks per hour
- Automatic water fill; automatic start / stop
- 3 factory preset options (40/36/30 racks per hour, 90/100/120 seconds per cycle): 70 seconds powerful wash | 10 seconds dwell time | 10 seconds hot water rinse
- Stainless steel non-clogging wash and rinse impeller
- 304L stainless steel for corrosion resistance
- Easily removable large capacity strainer
- Solid state, integrated LED display controls with status indicators
- Low-noise and large output 1 HP washing pump
- Rotating rinse impellers (both upper and lower) feature 5 rinse nozzles each - easily removable and interchangeable for cleaning and inspection
- Door actuated start
- Service diagnostics



PRODUCT SPECIFICATIONS

ITEM	46562	CYCLE (SEC)	90 seconds
MODEL	CD-KR-SU01	1 CYCLE WATER CONSUMPTION	0.71 gal. / 2.7L
POWER	3.8 kW	HOT WATER TEMPERATURE	140°F (60°C) → 180°F (82°C)
AMPS	17 Amps	ELECTRICAL	220V / 60Hz / 1Ph
WASH PUMP POWER	1 HP	DIMENSIONS (DWH)	24.6" x 23.6" x 34.2"
MAXIMUM RACK CAPACITY	40 Racks / hr.	WEIGHT	209 lbs. / 94.8 kg.
VARIABLE TIME CYCLE	30 - 210 seconds		

OMCAN INC.

Telephone: 1-800-465-0234
Fax: (905) 607-0234
E-mail: sales@omcan.com
Website: www.omcan.com



Follow us to keep up to date with the latest news and offers



2020.E.O.E

LEGENDS

DEEP	Door Open	41.5"
	Door Close	25.4"
ELECTRIC	A	32.5"
	a	2"
WATER	B	24.3"
	b	15.6"
DRAIN	C	32.5"
	c	7.7"

Ø = Electrical Supply Connection

220V/60/1 / 17Amp

Comes with 6 ft. (1.8 m) cord for direct connection

W = Fresh Water Connection


10 PSI - 40 PSI (0.7 kg / cm² - 2.8 kg / cm²)

Optimum water pressure - 15 PSI (1.0 kg / cm²)


Spry water hardness: 5 grains

D = Drain Hose Connection


Max. Height: 18" (457 mm)

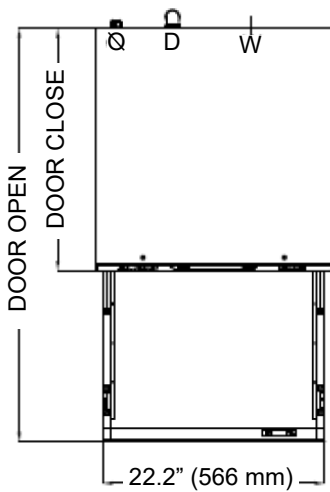


TOP VIEW

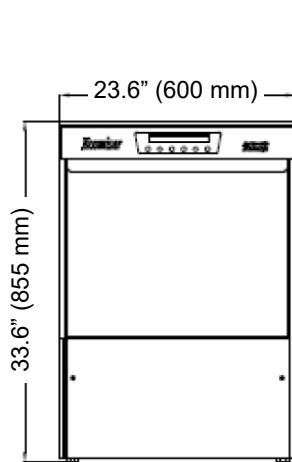

FRONT VIEW

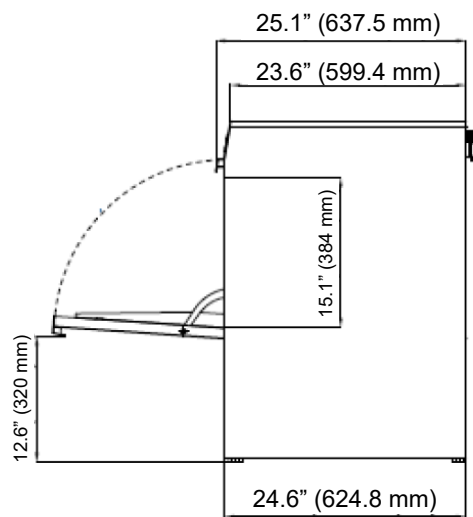

SIDE VIEW

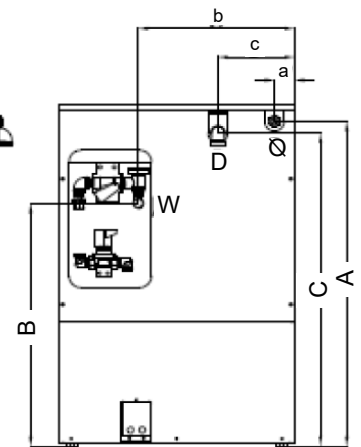

REAR VIEW

OMCAN INC.

Telephone: 1-800-465-0234

Fax: (905) 607-0234

E-mail: sales@omcan.com

Website: www.omcan.com



Follow us to keep up to date with the latest news and offers

